


## HYDRAULIC ANGLING BLADES



### OVERVIEW

Dymax HAO Hydraulic Angling Blades work well in diverse applications such as snow removal, general construction, and grading applications. All models feature 30 degrees hydraulic angling left and right.

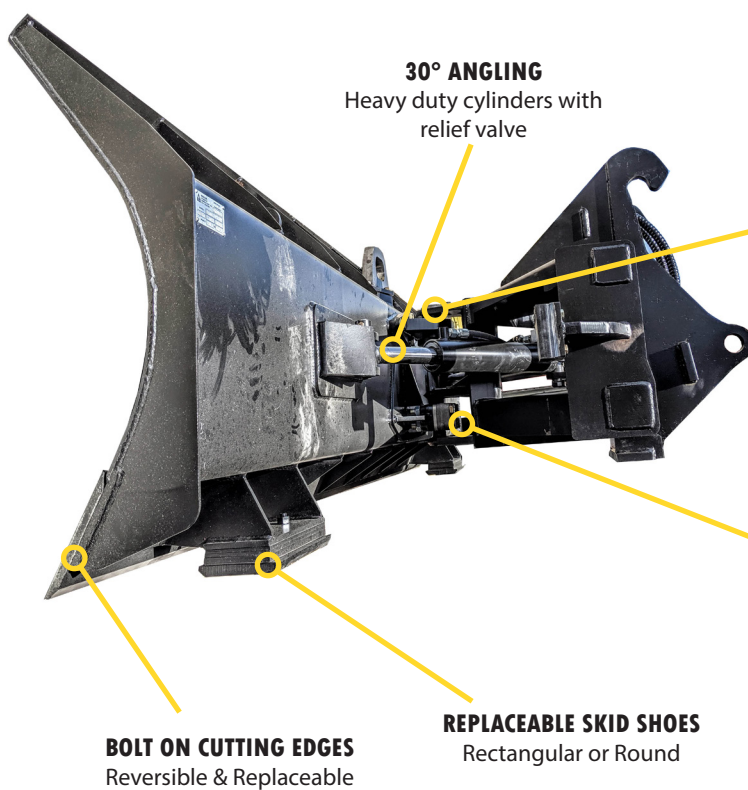

#### 30° ANGLING


Heavy duty cylinders with relief valve

**BOLT ON CUTTING EDGES**  
Reversible & Replaceable

**REPLACEABLE SKID SHOES**  
Rectangular or Round



Each blade is provided with two pin retainers. All models are shipped with the fixed retainer installed.

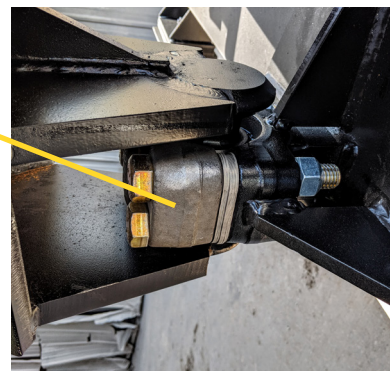


Shim adjustable lower ball joint provides oscillation when slotted retainer is installed.

## FEATURES AND SPECIFICATIONS

Model #	Description	Weight lb
Backhoe Loader/Small Wheel Loader Blades		
DX-BL-HAO-10ftx36in-BL	Blade – Hydraulic Angle Oscillation Interface – 10 feet wide x 36 inches tall <i>Standard 3.5x16 cylinder with relief valve</i>	2,550
Wheel Loader Blades (Class 50-80)		
DX-BL-HAO-12ftx42in-WL	Blade – Hydraulic Angle Oscillation Interface – 12 feet wide x 42 inches tall <i>Standard 4x16 cylinder with relief valve</i>	3,200
DX-BL-HAO-13ftx42in-WL	Blade – Hydraulic Angle Oscillation Interface – 13 feet wide x 42 inches tall <i>Standard 4x16 cylinder with relief valve</i>	3,500
DX-BL-HAO-14ftx42in-WL	Blade – Hydraulic Angle Oscillation Interface – 14 feet wide x 42 inches tall <i>Standard 4x16 cylinder with relief valve</i>	3,800
DX-BL-HAO-16ftx42in-WL	Blade – Hydraulic Angle Oscillation Interface – 16 feet wide x 42 inches tall <i>Standard 4x16 cylinder with relief valve</i>	4,000
DX-BL-HAO-18ftx42in-WL	Blade – Hydraulic Angle Oscillation Interface – 18 feet wide x 42 inches tall <i>Standard 5x16 cylinder with relief valve</i>	4,450
Standard Features: • replaceable bolt on cutting edges, • shim adjustable wear shoes (rectangular or round) • 30 degree angling • relief valve standard • oscillation frame with trunnion joint provided with fixed and slotted pin retainer		

Specifications are subject to change without notice.

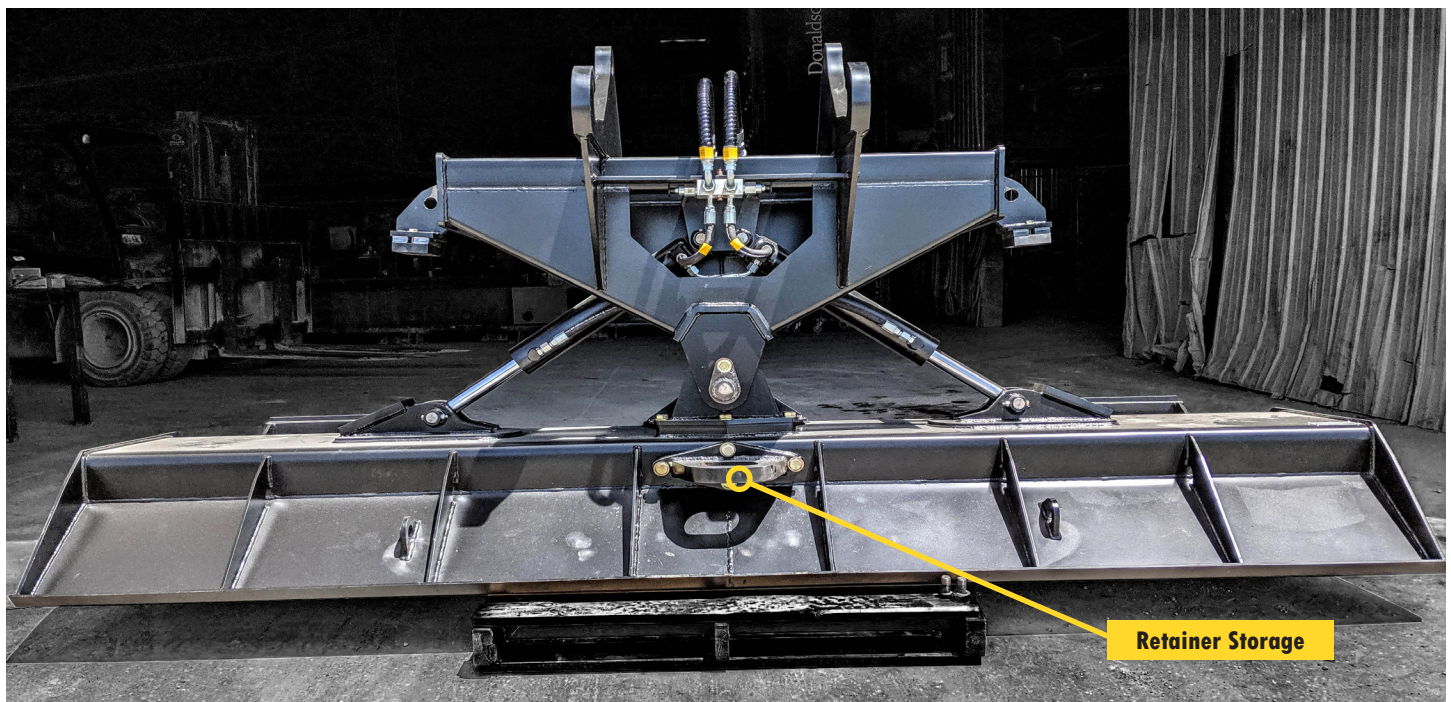

**DYMAXINC**  
402 Miller Drive  
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)  
Office: +1.785.456.2081  
Fax: +1.785.456.8328

[www.DYMAXINC.com](http://www.DYMAXINC.com)  
[sales@DYMAXINC.com](mailto:sales@DYMAXINC.com)