


ROLLOUT BUCKETS for Wheel Loaders

**PERFORMANCE
UNMATCHED.**

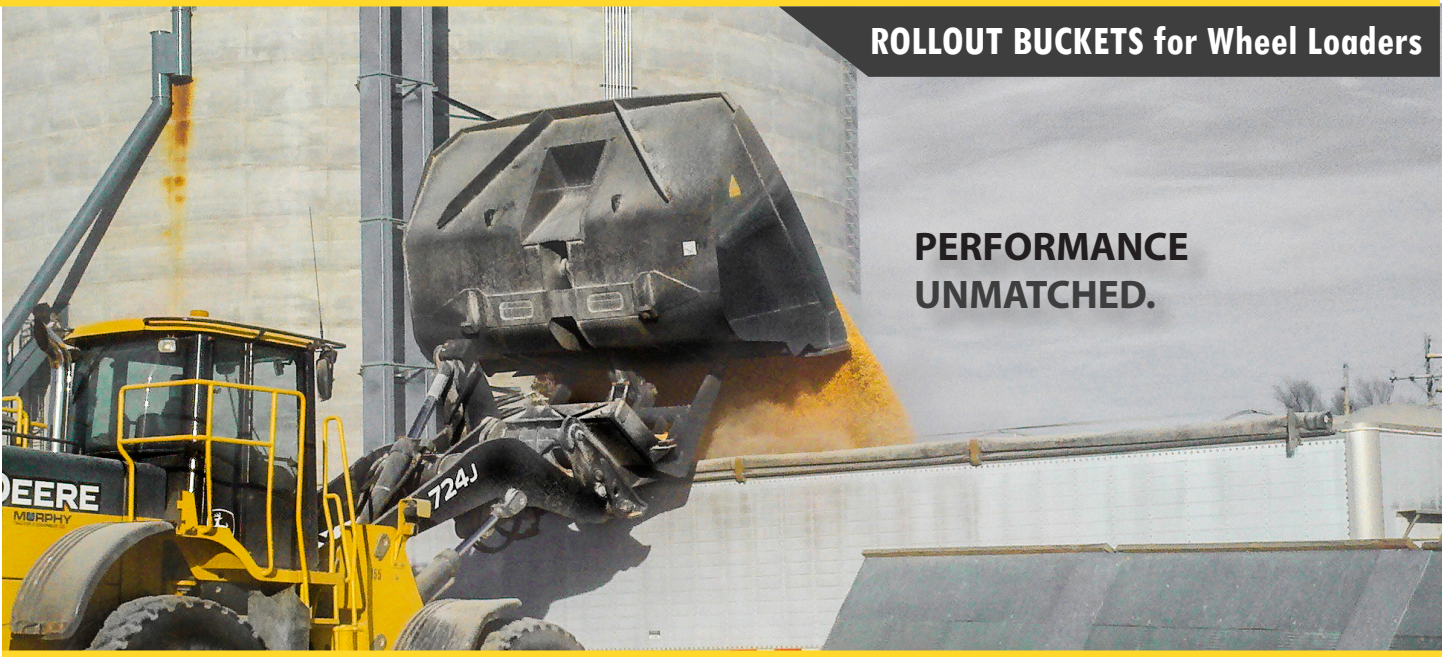

OVERVIEW

Dymax High Dump Roll Out Buckets are the solution to high dump clearance requirements, and are backed by the best service in the industry.

Especially popular for loading feed trucks at dairies, loading debris into tub grinders and working around landfill/transfer station applications, these high dump rollout buckets are made for wheel loaders and toolcarriers.

These buckets can be specially engineered to handle a variety of materials, making it the ideal tool for applications where material type, density and abrasiveness may vary, such as landfills and recycling centers.

Dymax High Dump Roll Out Buckets incorporate a single, vertically-mounted dump cylinder, which significantly improves the ratio of cylinder stroke to dump motion. It also reduces metal fatigue found on roll out buckets with floor pockets and two bottom-mounted dump cylinders.



FEATURES

- Center mounted cylinder provides greater durability and strength for the long haul. Time tested and proven to last up to 30,000 hours.
- Slide links provide additional cylinder protection preventing over extension.
- Relief valve standard.
- Made to fit specific coupler system or direct mount pin on.
- Replaceable bolt on cutting edges.

Standard Model Specifications

Cylinder Bore	4.50
Cylinder Rod Diameter (in.)	2.25
Cylinder Stroke (in.)	24
Moldboard Thickness (in.)	3/16, 3/8, 1/2
Bolt-on Cutting Edge	OEM or Dymax
Wear Pads	Standard Bolt-on



DYMAX Rollout Buckets are excellent for loading woodchips and chicken manure.



DYMAX Woodchip Rollout Bucket featuring integrated screen assembly. Custom solutions are available upon request.

Model No.	Description	Weight (lbs)
DX-BK-RO-3.00cyd-WL	Bucket - Roll-Out - 3.00 cyd capacity - Wheel Loader (Class 40, 50)	3,600
DX-BK-RO-3.50cyd-WL	Bucket - Roll-Out - 3.50 cyd capacity - Wheel Loader (Class 40, 50)	3,750
DX-BK-RO-4.00cyd-WL	Bucket - Roll-Out - 4.00 cyd capacity - Wheel Loader (Class 40, 50)	3,900
DX-BK-RO-4.50cyd-WL	Bucket - Roll-Out - 4.50 cyd capacity - Wheel Loader (Class 50, 60)	4,350
DX-BK-RO-5.00cyd-WL	Bucket - Roll-Out - 5.00 cyd capacity - Wheel Loader (Class 60)	5,000
DX-BK-RO-5.50cyd-WL	Bucket - Roll-Out - 5.50 cyd capacity - Wheel Loader (Class 60, 70)	5,220
DX-BK-RO-6.00cyd-WL	Bucket - Roll-Out - 6.00 cyd capacity - Wheel Loader (Class 60, 70, 80)	5,450
DX-BK-RO-6.50cyd-WL	Bucket - Roll-Out - 6.50 cyd capacity - Wheel Loader (Class 70, 80)	5,800
DX-BK-RO-7.00cyd-WL	Bucket - Roll-Out - 7.00 cyd capacity - Wheel Loader (Class 70, 80)	6,000
DX-BK-RO-7.50cyd-WL	Bucket - Roll-Out - 7.50 cyd capacity - Wheel Loader (Class 70, 80)	6,600
DX-BK-RO-8.00cyd-WL	Bucket - Roll-Out - 8.00 cyd capacity - Wheel Loader (Class 70, 80)	6,800
DX-BK-RO-9.00cyd-WL	Bucket - Roll-Out - 9.00 cyd capacity - Wheel Loader (Class 80)	7,100
DX-BK-RO-10.00cyd-WL	Bucket - Roll-Out - 10.00 cyd capacity - Wheel Loader (Class 90)	7,800
DX-BK-RO-11.00cyd-WL	Bucket - Roll-Out - 11.00 cyd capacity - Wheel Loader (Class 90)	8,250
DX-BK-RO-12.00cyd-WL	Bucket - Roll-Out - 12.00 cyd capacity - Wheel Loader (Class 90)	8,800

Specifications are subject to change without notice. Not all capacities listed will fit your machine. Dymax engineers size each model to match the loaders performance. In order to size a Rollout Bucket for your applications we'll need to know the following information

- Machine model and series?
- Coupler or pin on? If coupler what type?
- Material weight (max density per cubic yard or cubic foot)
- Width restrictions? or other jobsite restrictions?
- Dump height (minimum requirement)?



DYMAXINC
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXINC.com
sales@DYMAXINC.com