


**SKELETON ROCK BUCKETS****FEATURES**

- For wheel loaders, track loaders and toolcarriers.
- High strength T-1 steel (100,000 lb. yield) construction.
- Feature replaceable tips, or can be set up to accept OEM bolt on cutting edges.
- Dymax engineers can design customized buckets featuring wider or narrower spaces between the ribs as required.
- Spaces between ribs and holes in side plates allow loader operator to sift out fines before material is fed to crushing equipment.
- Available in sizes from 0.90 cyd to 7.50 cyd.

**OVERVIEW**

**Dymax Skeleton Rock Buckets** feature spacing between steel ribs that allow the bucket to retain larger-sized rocks, while sifting fine material. Ideal applications include heavy-duty rock handling in quarries, dam sites or in stockpile applications.

Available in a variety of capacities, these skeleton rock buckets feature high strength, abrasion-resistant steel construction resists impact and abrasion from demanding job sites.

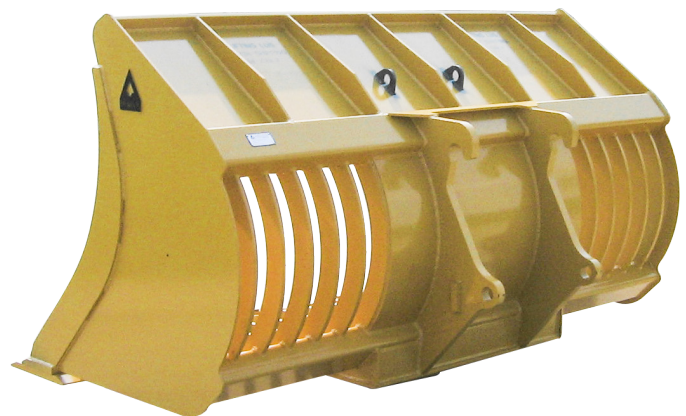



| Model #   | Description   | Weight lb |
|---|---|-----------|
| Models below for Class 50 and Class 60 Wheel Loader<br>Standard Features: • high strength T1 steel tine construction; 1.00 inch (108-120 inches wide)<br>6 inch tine spacing fitted with replaceable bolt on adapters and tips. (7059D styling) |   |           |
| DX-BK-SR-3.00cyd-WL-50  | Bucket - Skeleton Rock - 3.00 cyd capacity - Wheel Loader - Class 50  | 3,500     |
| DX-BK-SR-4.00cyd-WL-60  | Bucket - Skeleton Rock - 4.00 cyd capacity - Wheel Loader - Class 60  | 4,570     |
| Models below for Class 70 and Class 80 Wheel Loader<br>Standard Features: • high strength T1 steel tine construction; 1.00 inch (122.5 inches wide)<br>6 inch tine spacing fitted with replaceable bolt on adapters and tips. (7059D styling)   |   |           |
| DX-BK-SR-5.00cyd-WL-80  | Bucket - Skeleton Rock - 5.00 cyd capacity - Wheel Loader - Class 80  | 6,500     |
| DX-BK-SR-6.00cyd-WL-80  | Bucket - Skeleton Rock - 6.00 cyd capacity - Wheel Loader - Class 80  | 6,910     |
| Models below for Class 90 Wheel Loader<br>Standard Features: • high strength T1 steel tine construction; 2.00 inch (134.2 inches wide)<br>10 inch tine spacing fitted with replaceable bolt on adapters and tips. (7037D styling)               |   |           |
| DX-BK-SR-6.50cyd-WL-90  | Bucket - Skeleton Rock - 6.50 cyd capacity - Wheel Loader - Class 90  | 8,800     |
| Models below for Class 100 Wheel Loader<br>Standard Features: • high strength T1 steel tine construction; 2.00/2.5 inch combo (156.0 inches wide)<br>10 inch tine spacing fitted with replaceable bolt on adapters and tips. (7037D styling)    |   |           |
| DX-BK-SR-7.50cyd-WL-100   | Bucket - Skeleton Rock - 7.50 cyd capacity - Wheel Loader - Class 100 | 12,500    |
| Specifications are subject to change without notice. Weights listed are approximate and are subject to machine arrangement and fitup. Custom designs available upon request.  |   |           |



**DYMAXINC**  
402 Miller Drive  
Wamego, KS 66547 USA

**Toll Free: 800.530.5407 (USA/CAN)**  
**Office: +1.785.456.2081**  
**Fax: +1.785.456.8328**

**www.DYMAXINC.com**  
**sales@DYMAXINC.com**