


### GRIZZLY GRAPPLE RAKES

FOR BACKHOE LOADERS, SMALL WHEEL LOADERS  
AND TELEHANDLERS

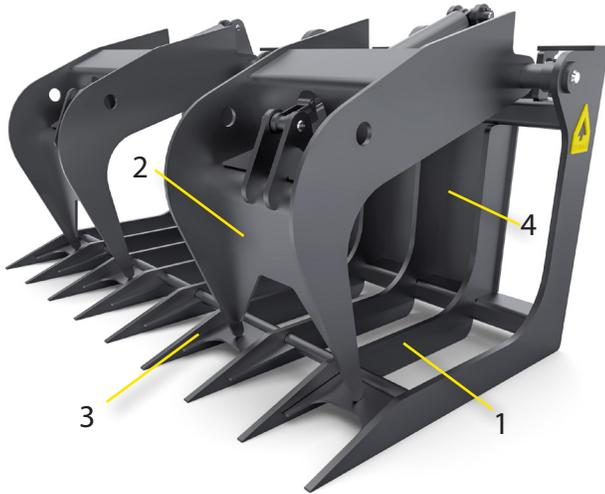

#### **DX-RK-GRTG (GRIZZLY TRASH GRAPPLE RAKE)**

**For Waste, Landfill, Refuse, Trash and Recycling**

1. 1.00 inch thick tine construction
2. Solid reinforced grapples for dozing applications
3. 36 inch long smooth tines for easy material unloading
4. Solid back plate

## OVERVIEW


**Dymax Grizzly Series Grapple Rakes** are available for backhoe loaders, wheel loaders and telehandlers working in land clearing and waste handling applications. Operators can quickly stack, load and sort various materials in many applications. Available with machine matched coupler hooks to fit many popular brands.

**Applications:** C&D debris removal; recycling and scrap yard; trees and brush piles; forestry and land clearing; waste handling; transfer station applications.

#### **DX-RK-GRZ (GRIZZLY LAND CLEARING RAKE)**


**For Land Clearing, Street Cleanup, Debris, Brush**

1. 1.00 inch outside x 0.75 inch thick inner tine construction
2. Solid HD grapples for dozing applications
3. Serrated tines
4. 48 inch grapple opening


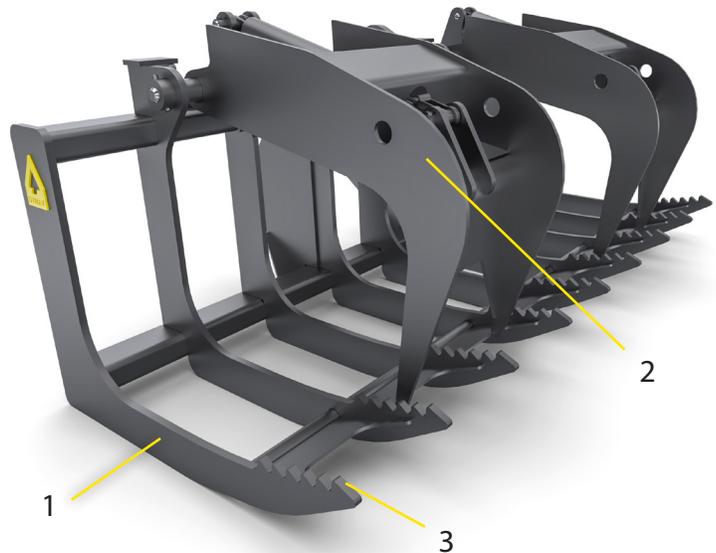


Model No.	Description - Double Grapple Models (All models shown with 10 inch tine spacing on average)	Weight (lbs)
DX-RK-GRTG-66x8-TH-08K DX-RK-GRTG-66x8-WL-30	Rake-Grizzly Trash Grapple-66 inch raking width x 8 steel tines-Telehandler-8000 lb class Rake-Grizzly Trash Grapple-66 inch raking width x 8 steel tines-Wheel Loader-Class 30 Standard Features: 1.00 inch A572 Tines 8 total, Solid HD grapples for dozing applications, Smooth tines for easier unloading, 36.6 inch tine length,	2,180 2,180
DX-RK-GRZ-72x9-TH-08K	Rake-Grizzly-72 inch raking width x 9 steel tines-Telehandler-8,000 lb Standard Features: 1.0 inch thick outside rake tines x 0.75 inch thick inside tines, 8 inch tine spacing, Serrated end tine design, Max Opening 48 inches	1,700
DX-RK-GRZ-82x10-BL-10	Rake-Grizzly-82 inch raking width x 10 steel tines-Backhoe Loader-Class 10 Standard Features: 1.00 inch thick outside rake tines x 0.75 inch thick inside tines, 8 inch tine spacing, Serrated end tine design, Max Opening 48 inches	1,750
DX-RK-GRZ-95.5x11-BL-10 DX-RK-GRZ-95.5X11-BL-20	Rake-Grizzly-95.5 inch raking width x 11 tines-Backhoe Loader-Class 10 Rake-Grizzly-95.5 inch raking width x 11 tines-Backhoe Loader-Class 20 Standard Features: 1.00 inch thick outside rake tines x 0.75 inch thick inside tines, 8 inch tine spacing, Serrated end tine design, Max Opening 48 inches	1,900 1,900
DX-RK-GRZ-98x11-WL-40	Rake-Grizzly-98 inch raking width x 11 steel tines-Wheel Loader-Class 40 Standard Features: 1.00 inch thick outside rake tines x 0.75 inch thick inside tines, 8 inch tine spacing, Serrated end tine design, Max Opening 48 inches	2,100
Design and specifications are subject to change without notice. For custom applications or designs contact Dymax sales 1-800-530-5407		

## DX-RK-GRTG (TRASH GRAPPLE)

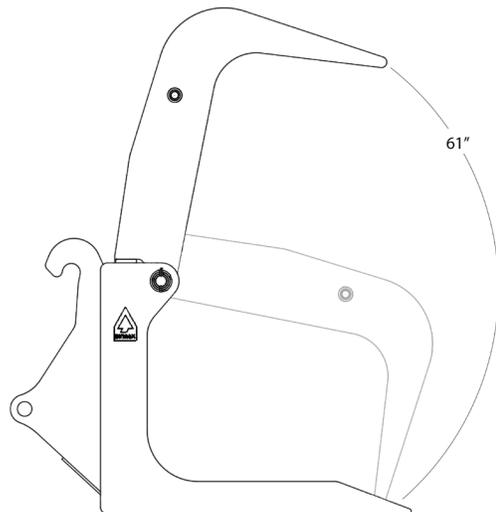

## DX-RK-GRZ (LAND CLEARING)

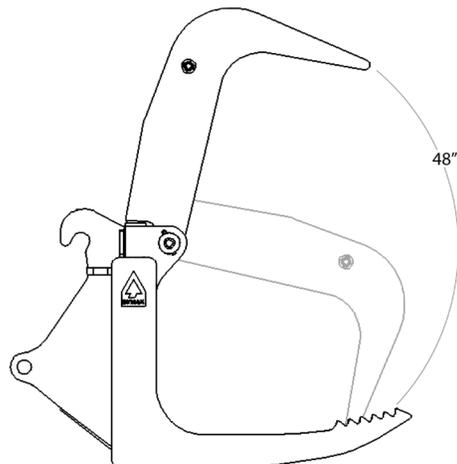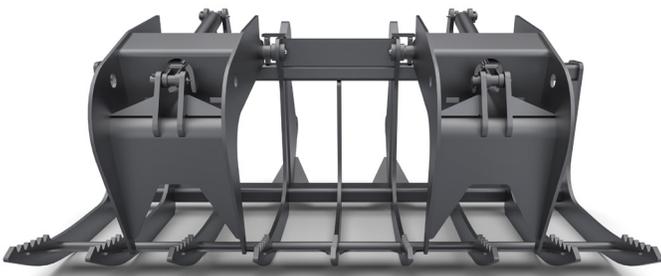

**DYMAXINC** | Toll Free: 800.530.5407 (USA/CAN)  
402 Miller Drive | Office: +1.785.456.2081  
Wamego, KS 66547 USA | Fax: +1.785.456.8328

[www.DYMAXINC.com](http://www.DYMAXINC.com)  
[sales@DYMAXINC.com](mailto:sales@DYMAXINC.com)