
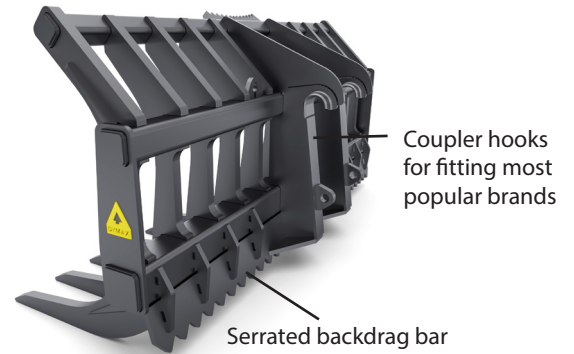


LOADER CLEARING RAKES

FOR WHEEL LOADERS AND TOOLCARRIERS

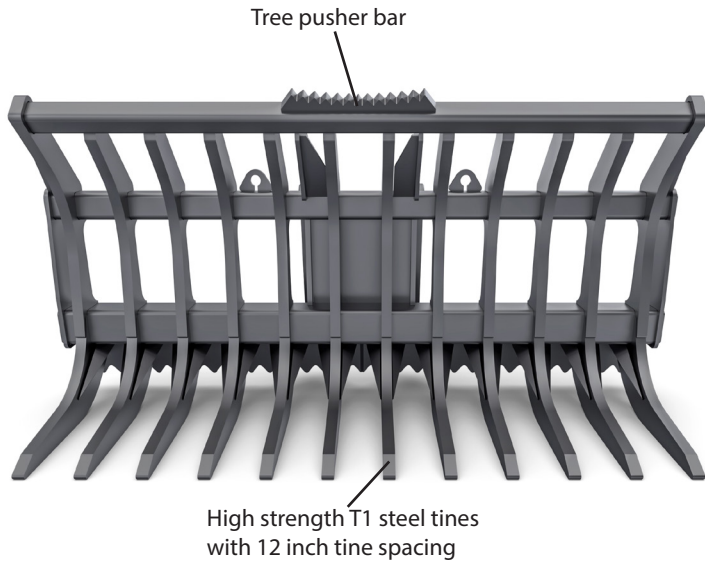

OVERVIEW

DX-RK-LR

Dymax Loader Clearing Rakes are available for wheel loaders working in land clearing applications to remove unwanted vegetation, trees and brush and are excellent for stacking and collecting materials. Available with coupler hooks to fit most popular brands.

Applications: utility right of way maintenance; remediation; vegetation management; roadside clearing; debris sorting and stacking; burn pile and site cleanup.

Machine Operating Weight Size/Class	Model No.	Description	Weight (lbs)
Backhoe Loader	DX-RK-LR-96x10-BL-10/20 (12 inch spacing x 10 tines)	Rake-Loader Rake-96 inch raking width x 10 tines-Backhoe Loader-Class 10/20 STANDARD FEATURES: 1.00" thick steel tines x stow legs, serrated backdrag bar	1,250
20,000-24,000	DX-RK-LR-102x10-WL-40 (12 inch spacing x 10 tines)	Rake-Loader Rake-102 inch raking width x 10 steel tines-Wheel Loader-Class 40 STANDARD FEATURES: 1.25" thick steel tines x stow legs, serrated backdrag bar	2,950
26,000-31,500	DX-RK-LR-105x10-WL-50 (12 inch spacing x 10 tines)	Rake-Loader Rake-105 inch raking width x 10 steel tines-Wheel Loader-Class 50 STANDARD FEATURES: 1.50" thick steel tines x stow legs, serrated backdrag bar	3,000
32,000-38,000	DX-RK-LR-117x11-WL-60 (12 inch spacing x 11 tines)	Rake-Loader Rake-117 inch raking width x 11 steel tines-Wheel Loader-Class 60 STANDARD FEATURES: 1.50" thick steel tines x stow legs, serrated backdrag bar	3,350
40,000-47,500	DX-RK-LR-130x12-WL-70 (12 inch spacing x 12 tines)	Rake-Loader Rake-130 inch raking width x 12 steel tines-Wheel Loader-Class 70 STANDARD FEATURES: 1.75" thick steel tines x stow legs, serrated backdrag bar	4,250
48,000-56,000	DX-RK-LR-143x13-WL-80 (12 inch spacing x 13 tines)	Rake-Loader Rake-143 inch raking width x 13 steel tines-Wheel Loader-Class 80 STANDARD FEATURES: 1.75" thick steel tines x stow legs, serrated backdrag bar	4,650

Design and specifications are subject to change without notice. For custom applications or designs contact Dymax sales 1-800-530-5407



DYMAX INC
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXINC.com
sales@DYMAXINC.com