



ROCK AND ROOT RAKES FOR TRACK DOZERS

OVERVIEW



Dymax Rock and Root Rakes are available for fitting track dozers operating in large scale land clearing operations. Excellent for clearing rocks, roots, vegetation and debris of all types. All models are made for fitting conventional outside mounted push arm groups and replace the factory semi-u or straight dozer blade.

Applications: site remediation; mining for accessing minerals and ore; erosion control; field preparation to remove unwanted obstructions; fire break management in forest land; road maintenance and construction; demolition.

DX-RK-RR OR RRXD - TRACK DOZERS

The Best Rakes With The Toughest Features

1. T1 steel tines with AR400 weld-on replaceable tips
2. Extended brush rack
3. High strength bottom torque tube
4. Fits conventional push arms & factory lift cylinders

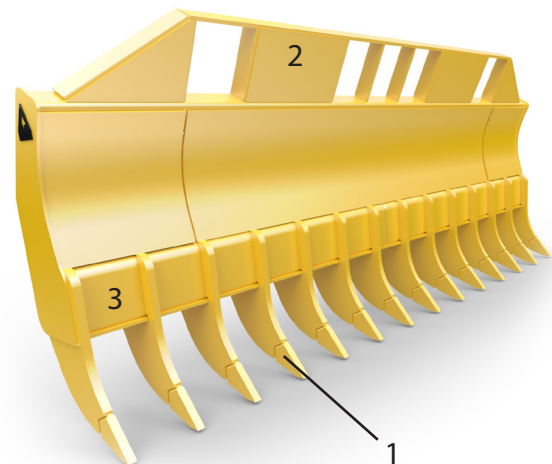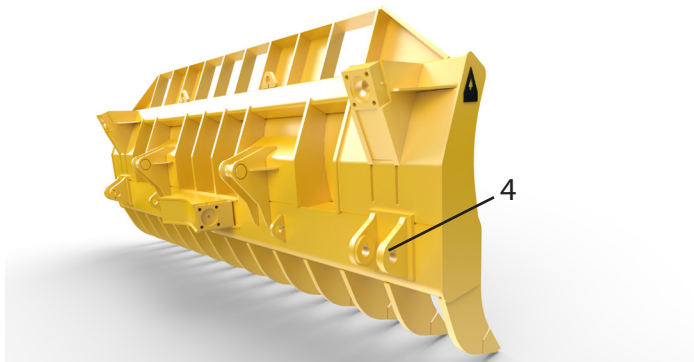

Machine Reference Size/Class	Model No.	Description	Weight (lbs)
Cat D6 Deere 850 Komatsu D65	DX-RK-RR-136in-TD-10 (8 inch spacing x 15 tines)	Rake-Rock & Root-136 inches wide-Track Dozer-Class 10 STANDARD FEATURES: Tine Spacing: 8 inch on average x 1.50" thick steel tines, 70" ht	5,300
	DX-RK-RR-165in-TD-10LGP (8 inch spacing x 18 tines)	Rake-Rock & Root-165 inches wide-Track Dozer-Class 10 LGP Wide Track STANDARD FEATURES: Tine Spacing: 8 inch on average x 1.50" thick steel tines, 70" ht	6,300
	DX-RK-RR-172in-TD-10LGP (11.5 inch spacing x 14 tines)	Rake-Rock & Root-172 inches wide-Track Dozer-Class 10 (Wide Track) STANDARD FEATURES: Tine Spacing: 8 inch on average x 1.50" thick steel tines, 72" ht	
Cat D7 Komatsu D85	DX-RK-RR-172in-TD-20 (11.5 inch spacing x 14 tines)	Rake-Rock & Root-172 inches wide-Track Dozer-Class 20 STANDARD FEATURES: Tine Spacing: 11.5 inch on average x 1.50" thick steel tines, 72" ht	6,540
Cat D8 Komatsu D155 Deere 1050	DX-RK-RR-158in-TD-30 (14 inch spacing x 10 tines)	Rake-Rock & Root-158 inches wide-Track Dozer-Class 30 STANDARD FEATURES: Tine Spacing: 14 inch on average x 2.50" thick steel tines, 78" ht	8,950
	DX-RK-RR-158in-TD-30 (6 inch spacing x 18 tines)	Rake - Rock & Root - 158 inches wide - Track Dozer - Class 30 STANDARD FEATURES: Tine Spacing: 6 inch on average x 2.50" thick steel tines, 78" ht	9,660
	DX-RK-RRXD-180in-TD-30LGP (10.5 inch spacing x 14 tines)	Rake - Rock & Root Extreme Duty - 180 inches wide - Track Dozer - Class 30 LGP STANDARD FEATURES: Tine Spacing: 10.5 inch on average x 3.00" thick steel tines, 78" ht	11,200
Cat D9	DX-RK-RRXD-180in-TD-40 (8 inch spacing x 17 tines)	Rake-Rock & Root Extreme Duty-180 inches wide-Track Dozer-Class 40 STANDARD FEATURES: Tine Spacing: 8 inch on average x 3.00" thick steel tines, 84" ht	12,450
Cat D10	DX-RK-RRXD-192in-TD-50 (12 inch spacing x 16 tines)	Rake-Rock & Root Extreme Duty-192 inches wide-Track Dozer-Class 50 STANDARD FEATURES: Tine Spacing: 12 inch on average x 3.00" thick steel tines, 84" ht	15,000
	DX-RK-RRXD-216in-TD-50 (9 inch spacing x 18 tines)	Rake-Rock & Root Extreme Duty-216 inches wide-Track Dozer-Class 50 STANDARD FEATURES: Tine Spacing: 9 inch on average x 3.00" thick steel tines, 92" ht	16,000

Design and specifications are subject to change without notice. For custom applications or designs contact Dymax sales 1-800-530-5407



DYMAXINC | Toll Free: 800.530.5407 (USA/CAN)
 402 Miller Drive | Office: +1.785.456.2081
 Wamego, KS 66547 USA | Fax: +1.785.456.8328

www.DYMAXINC.com
sales@DYMAXINC.com