


OVERVIEW

Whether you're breaking down concrete, moving rubble or sorting scrap, the **Dymax Demolition Grapple Bucket** is designed for the toughest applications. This wedge-floor bucket is heavily reinforced, with independent top grapples made from high-strength T1 steel. Commonly used in demolition projects, construction sites and recycling facilities.

KEY FEATURES

- Independent grapples made from high-strength T1 steel.
- Strong wedge floor design for added durability.
- Replaceable bolt-on cutting edge and rear wear pads.
- Reinforced with exterior side wear plates and heavy-duty side plates with corner and side cutters.
- Hydraulic cushion valve package and large-capacity cylinders for smooth operation.
- Available in 4.50 yd³ to 8.00 yd³ capacities, with widths from 115 to 150 inches.

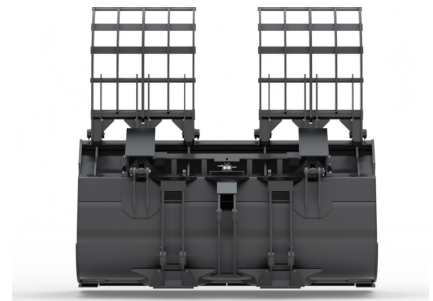

Model Code	Description	Weight
DX-BK-GLDM-4.50cyd-WL-70	Bucket-Grapple Demolition-4.50 cyd capacity-Wheel Loader-Class 70	6250 lbs
DX-BK-GLDM-5.00cyd-WL-80	Bucket-Grapple Demolition-5.00 cyd capacity-Wheel Loader-Class 80	6650 lbs
DX-BK-GLDM-6.00cyd-WL-80	Bucket-Grapple Demolition-6.00 cyd capacity-Wheel Loader-Class 80	7100 lbs
DX-BK-GLDM-7.00cyd-WL-90	Bucket-Grapple Demolition-7.00 cyd capacity-Wheel Loader-Class 90	12000 lbs
DX-BK-GLDM-8.00cyd-WL-90	Bucket-Grapple Demolition-8.00 cyd capacity-Wheel Loader-Class 90	13000 lbs

Hydraulic Requirements

Your machine will require 3rd function auxiliary lines.

CIRCUIT 1: Clamp Operation. Type: Two way. Flow/Pressure: GPM (min/max) 15-25, PSI (max) 3,000.

NOT SUPPLIED: Does not include jumper hoses to machine lines or quick disconnects.

Design and specifications are subject to change without notice. Please contact Dymax sales for custom solutions: 1-800-530-5407.



DYMAX INC | Toll Free: 800.530.5407 (USA/CAN)
 402 Miller Drive | Office: +1.785.456.2081
 Wamego, KS 66547 USA | Fax: +1.785.456.8328

www.DYMAXINC.com
sales@DYMAXINC.com