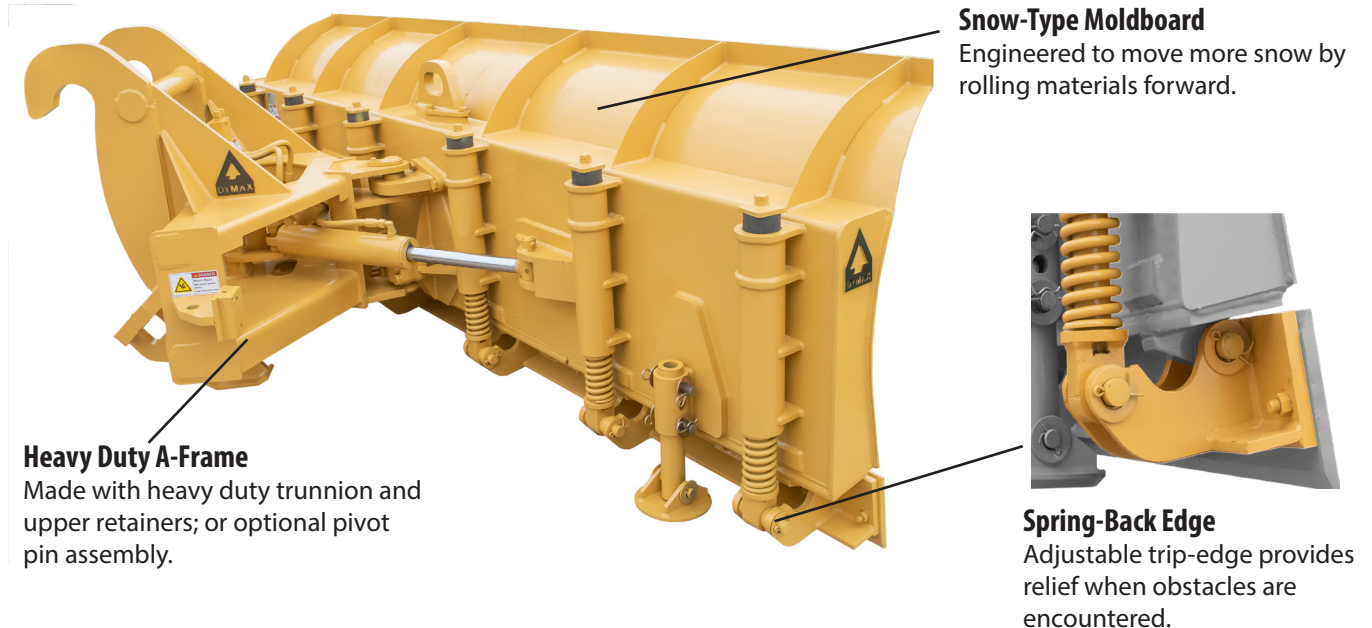


TRIP EDGE SNOW PLOWS**OVERVIEW****RELIABLE SNOW REMOVAL**

The Dymax Trip Edge Snowplow protects your machine and your streets by absorbing impacts from hidden obstacles like manhole covers and curbs. Featuring heavy-duty torsion springs and a snow-rolling moldboard design, this plow delivers clean, efficient snow removal for city streets, municipal lots, and regional roadways.

APPLICATIONS

- **City and roadway obstacles, such as manhole covers and loose debris.**


KEY BENEFITS

- **Built for City Streets** – Trip-edge sections absorb impacts from manholes, curbs, and uneven pavement, protecting your machine and operator.
- **Reliable Snow Removal** – Heavy-duty torsion springs with rubber isolators provide smooth trip-and-return action for consistent clearing.
- **Full-Axis Movement** – Lower trunnion design allows the blade to follow road contours for a cleaner finish with less edge wear.
- **Optimized for Heavy Winter Regions** – Performs in the harsh conditions of the Northeast and Upper Midwest, where packed snow and ice are common.
- **Efficient, Low-Maintenance Design** – Adjustable round shoes extend edge life, while optional serrated edges cut through ice and compacted snow.

FEATURES AND SPECIFICATIONS

Model #	Description	Weight
Wheel Loader Blades (Class 50-80)		
DX-BL-TPE-12ftx42in-WL-50 DX-BL-TPE-12ftx42in-WL-60	Blade – Trip Edge Snow Plow– 12 feet wide x 42 inches tall <i>Standard 4x16 cylinder with relief valve</i>	3,270 lbs
DX-BL-TPE-13ftx42in-WL-60	Blade – Trip Edge Snow Plow– 13 feet wide x 42 inches tall <i>Standard 4x16 cylinder with relief valve</i>	3,550 lbs
DX-BL-TPE-14ftx42in-WL-70	Blade – Trip Edge Snow Plow– 14 feet wide x 42 inches tall <i>Standard 4x16 cylinder with relief valve</i>	3,900 lbs
DX-BL-TPE-16ftx48in-WL-70 DX-BL-TPE-16ftx48in-WL-80	Blade – Trip Edge Snow Plow – 16 feet wide x 48 inches tall <i>Standard 5x16 cylinder with relief valve</i>	4,500 lbs
DX-BL-TPE-20ftx48in-WL-80	Blade – Trip Edge Snow Plow– 20 feet wide x 48 inches tall <i>Standard 5x16 cylinder with relief valve</i>	6,050 lbs
<p>Standard Features: Replaceable bolt-on cutting edges, 30 degree angling left and right, relief valve standard, oscillating A-frame design, provided with fixed and slotted pin retainer, spring canisters with trip edge system + bolt-on edge group, mechanical adjusting round skid shoes</p> <p>Options: Pivot pin frame, side wings (box blade style)</p>		

Specifications are subject to change without notice.

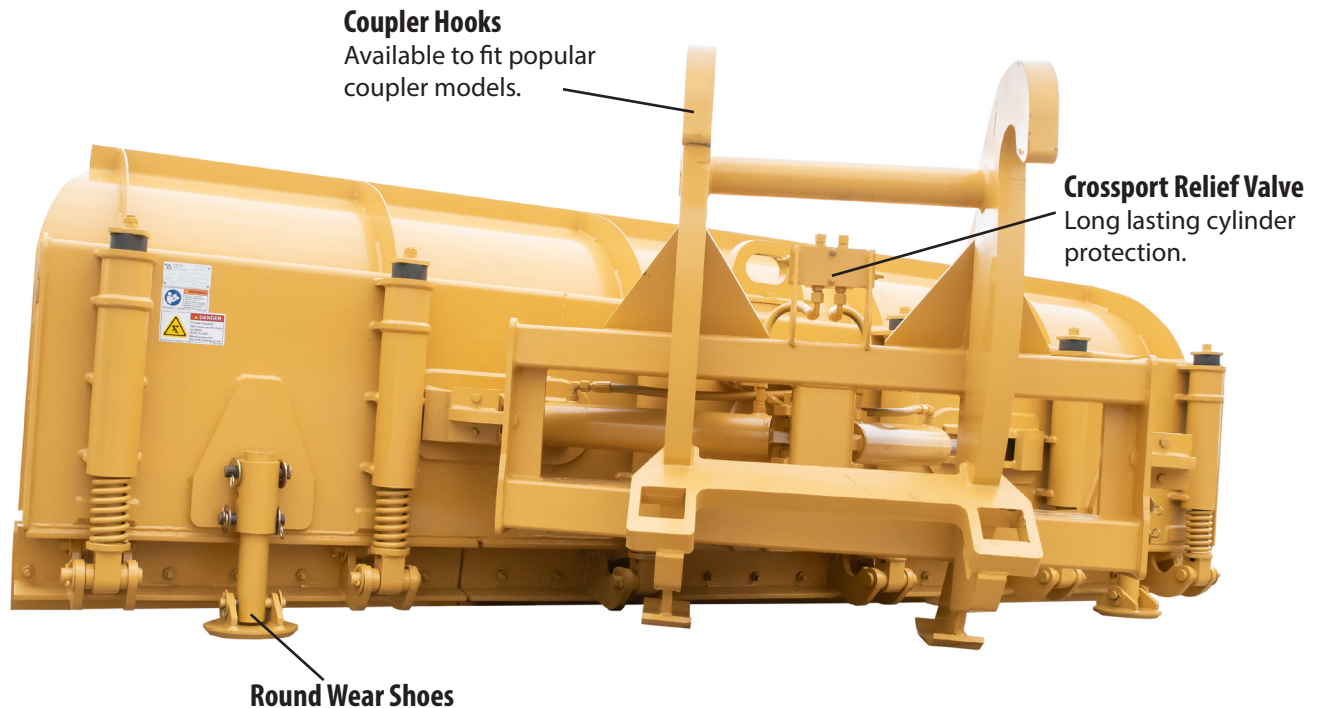

DYMAXINC
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXINC.com
sales@DYMAXINC.com