DYMAXINC

BUILT TO OUTLAST.

IRONCLAW 360° EXCAVATOR GRAPPLE RAKE



APPLICATIONS

- **Wildfire cleanup and burn remediation**
- **Forestry and logging cleanup**
- **Brush, slash, and debris handling**
- **Loading tub grinders and chippers**
- **Pile building and biomass loading**
- **Right-of-way and utility corridor clearing**

OVERVIEW

The **Dymax IronClaw™ Excavator Grapple Rake** combines a heavy-duty rake, power-link grapple, and full 360° rotation. Operators can rake, sort, shake out dirt, grip, rotate, and place material with precision using a single, versatile attachment.



KEY BENEFITS

- **One attachment, more capability**. Rake, 2-cylinder powerlink grapple, and 360° rotation.
- **Faster, cleaner work** with the ability to shake out dirt and handle material precisely.
- **Less machine movement** thanks to full rotation and improved control.
- **Built for harsh conditions** with heavy-duty construction and reliable performance.
- **Safer, more efficient** handling when loading tub grinders, building piles, or clearing debris.

DYMAX

DYMAXINC
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXINC.com
sales@DYMAXINC.com

FEATURES AND SPECIFICATIONS








Sort material with an innovative powerlink grapple powered by twin hydraulic cylinders and offering 180° of rotation. Equipped with replaceable ESCO or Cat-style teeth, operators can dig, rip, shake out dirt, and leave unwanted material behind. The system is supplied with 24V electrical and features a port-beyond setup, allowing it to work seamlessly with machines equipped with one or two hydraulic circuits.


Model #	Description	Weight LBS
IRONCLAW-Hydraulic Excavator Grapple Rakes		
DX-RKGL-ICPL-360X52-HX-20T/25T	Rake with Grapple - IronClaw Powerlink - 360 degree rotation x 51 inches wide - Hydraulic Excavator - 20-25 ton	4,250
DX-RKGL-ICPL-TRQX52-HX-20T/25T	Rake with Grapple - IronClaw Powerlink - for Tiltrotator coupler x 51 inches wide - Hydraulic Excavator - 20-25 ton	3,720
Standard Features: 360° rotator with twin motor drive, supported by pinion bearing, equipped with needle and relief valves for speed adjustment and motor protection, **Upper Clamp:** 38 inch wide grapple clamp, 2.0" thick T1 steel, 4 heavy duty tines, progressive link clamp, **Clamp Cylinders:** 3.00 x 12.00 stroke hydraulic cylinders (2 total) with replaceable bushings and high strength greaseable pins, **Lower Rake:** 5 tines made from 2.0" thick T1 steel, approximate spacing 10 inches, Replaceable tine tips on lower rake and rear doubler plates for smooth transition between tine and tooth. **Options:** Esco Ultralok or Cat Advansys Teeth		


Specifications are subject to change without notice.

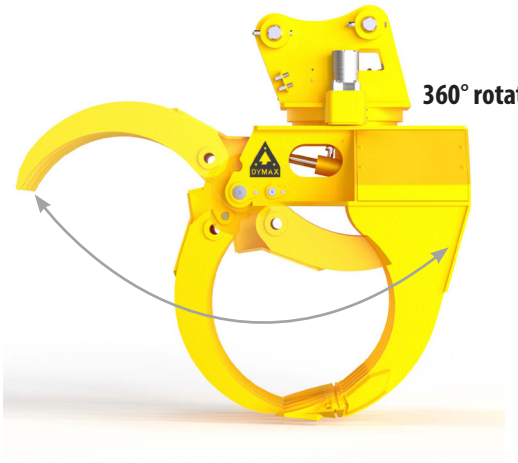

180° power-link clamp handles large or small-diameter material with ease.



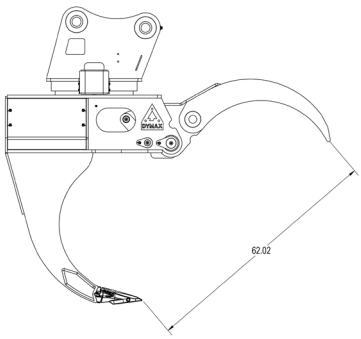

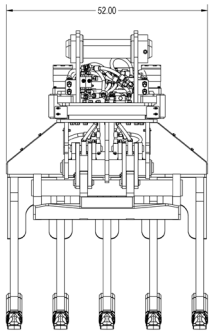

DYMAX

DYMAXINC
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXINC.com
sales@DYMAXINC.com