
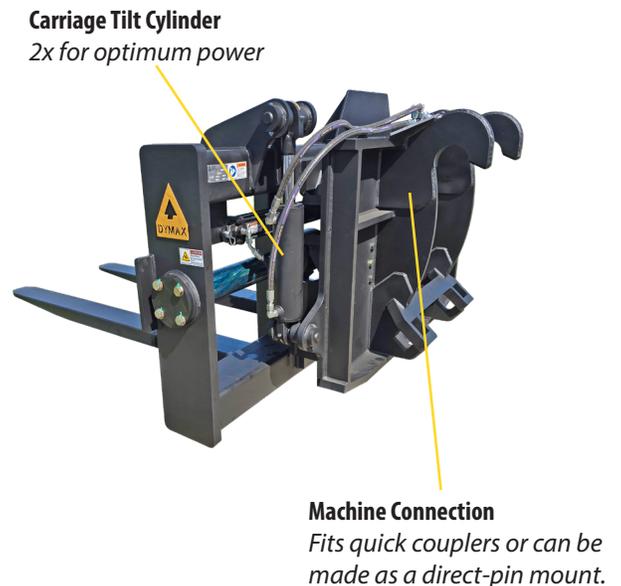


## HYDRAULIC ADJUSTABLE TINE & TILTING CARRIAGE PALLET FORKS

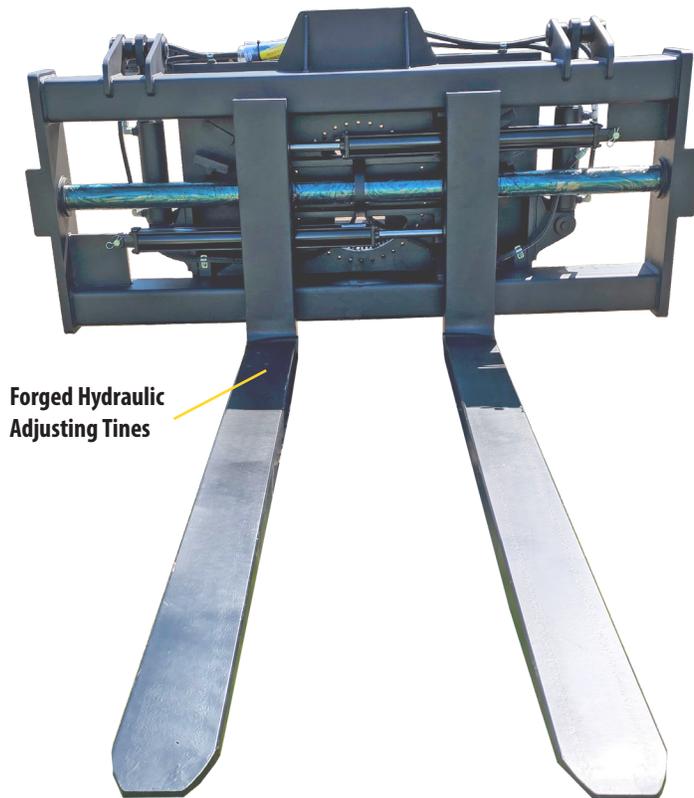

The **Dymax Hydraulic Adjustable Tine & Tilting Carriage Pallet Fork** for wheel loaders is built for heavy-duty material handling in demanding environments. Featuring dual hydraulic tine adjustment and a hydraulic tilting carriage, it allows operators to quickly position and level loads on uneven terrain.

### APPLICATIONS

- **Heavy duty material handling**
- **Military bases, mine sites, rail yards, and industrial operations.**

### KEY BENEFITS


- **Hydraulic Tine & Tilt Adjustment Controlled from the Cab**  
Dual hydraulic cylinders allow operators to quickly set tine spacing without ever leaving the seat — saving time and keeping production moving.
- **Tilting Carriage for Uneven Terrain**  
Hydraulic side-to-side tilt stabilizes loads on slopes, rough ground, and unlevel surfaces, making it ideal for mine sites, military staging areas, rail yards, and off-road work.
- **Built-In Safety**  
Eliminates manual repositioning. No pinched fingers. No strained backs. No unsafe field adjustments.
- **Heavy-Duty Construction**  
High-strength forged tines with oversized shaft, and a robust slew ring deliver long-lasting performance and durability.
- **Integrated Load Holding Valves**  
Precision-integrated valving maintains stability and consistent hydraulic performance, keeping loads secure when it matters most.

# SPECIFICATIONS

Model #	Description	Weight lb
WL-60 for loaders with operating weight between 32,000 & 38,000 lbs		
DX-FK-PTHHT-96inx96in-WL-60	<b>Fork-Pallet Hydraulic Tine and Tilt Carriage-96 inch tine length x 96 inch carriage-Wheel Loader-Class 60</b> STANDARD FEATURES: Hydraulic adjustable, shaft mount, non swinging forged tines - 96.00 inch tine length @ 3.00 inch thick x 6.00 inch wide - Rated capacity @ 24" load centers: 28,400 lbs per pair of tines - Hydraulic tilt carriage up with integrated load check provide tilt up to 15 degrees max.	4,500
WL-80 for loaders with operating weight between 48,000-58,000 lbs		
DX-FK-PTHHT-84inx96in-WL-80	<b>Fork-Pallet Hydraulic Tine and Tilt Carriage-84 inch tine length x 96 inch carriage-Wheel Loader-Class 80</b> STANDARD FEATURES: Hydraulic adjustable, shaft mount, non swinging forged tines - 84.00 inch tine length @ 3.50 inch thick x 8.00 inch wide - Rated capacity @ 24" load centers: 54,600 lbs per pair of tines - Hydraulic tilt carriage up with integrated load check provide tilt up to 15 degrees max.	6,300
DX-FK-PTHHT-96inx96in-WL-80	<b>Fork-Pallet Hydraulic Tine and Tilt Carriage-96 inch tine length x 96 inch carriage-Wheel Loader-Class 80</b> STANDARD FEATURES: Hydraulic adjustable, shaft mount, non swinging forged tines - 96.00 inch tine length @ 3.50 inch thick x 8.00 inch wide - Rated capacity @ 24" load centers: 54,600 lbs per pair of tines - Hydraulic tilt carriage up with integrated load check provide tilt up to 15 degrees max.	6,600
WL-90 for loaders with operating weight between 66,000-80,000 lbs		
DX-FK-PTHHT-96inx110in-WL-90	<b>Fork-Pallet Hydraulic Tine and Tilt Carriage-96 inch tine length x 110 inch carriage-Wheel Loader-Class 90</b> STANDARD FEATURES: Hydraulic Adjustable, shaft mount, non swinging forged tines - 96.00 inch tine length @ 4.00 inch thick x 8.00 inch wide - Rated capacity @ 24" load centers: 67,600 lbs per pair of tines - Hydraulic tilt carriage up with integrated load check provide tilt up to 15 degrees max.	7,500

Specifications are subject to change without notice.

All loaders require 3rd and 4th auxiliary functions for operation.

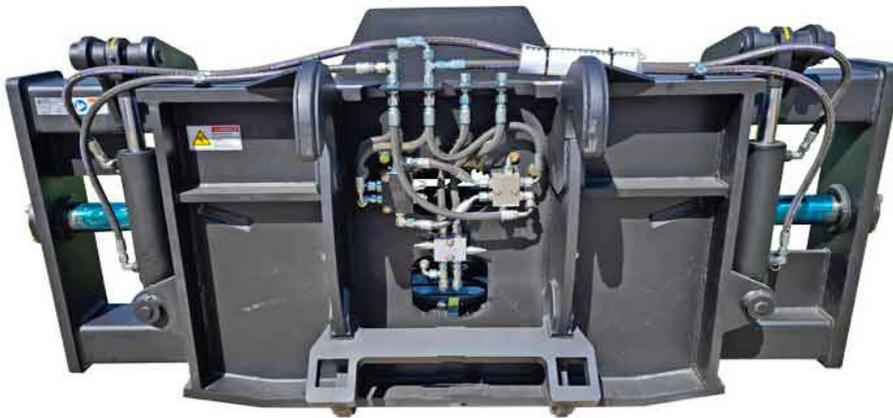

Heavy duty slew ring provides smooth tilt operation.



**DYMAXINC** | Toll Free: 800.530.5407 (USA/CAN)  
402 Miller Drive | Office: +1.785.456.2081  
Wamego, KS 66547 USA | Fax: +1.785.456.8328

[www.DYMAXINC.com](http://www.DYMAXINC.com)  
[sales@DYMAXINC.com](mailto:sales@DYMAXINC.com)