DYMAXINC


BUILT TO LAST.

FORESTRY HEAVY DUTY GRAPPLES

OVERVIEW

FOR HYDRAULIC EXCAVATORS (13-25T)

Dymax Forestry Grapples are built tough for forestry and greenwaste handling, featuring durable T1 steel tines that grip with strength and precision. Designed with a heel for efficient bucking and sorting, it offers unmatched versatility and control in demanding applications. Whether you're loading logs or clearing debris, this grapple is engineered to handle the job with reliability and rugged performance.

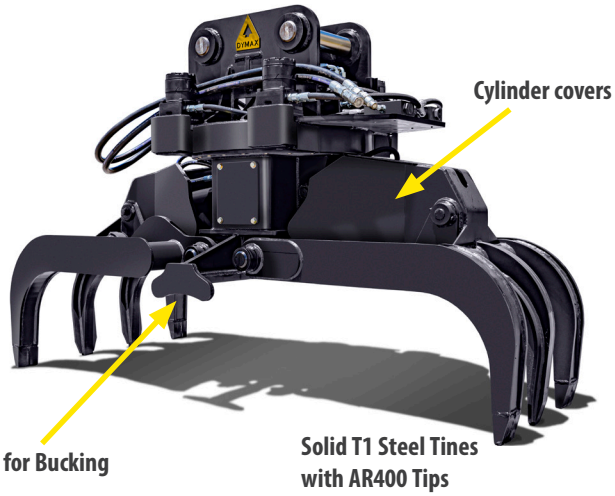

STANDARD FEATURES:

- 3 over 4 tine design
- Side heel arms for log handling
- Built in cylinder covers
- Two drive motors with pinion support and guard package (360 models)
- Machine adapter with pins (360 models)
- Flat top for mounting to a tiltrotator head plate (TRQ models)

OPTIONS:

- 24v Electro hydraulic valve with wire, fuse and switch

Model Code	Description	Weight
DX-GL-FYHD2-360-HX-13T	Grapple-Forestry Heavy Duty, Twin Pinion Drive-360 degrees rotation-Hydraulic Excavator-13 ton	3150 lbs
DX-GL-FYHD2-360-HX-20T	Grapple-Forestry Heavy Duty, Twin Pinion Drive-360 degrees rotation-Hydraulic Excavator-20 ton	4100 lbs
DX-GL-FYHD2-360-HX-25T	Grapple-Forestry Heavy Duty, Twin Pinion Drive-360 degrees rotation-Hydraulic Excavator-25 ton	4200 lbs
DX-GL-FYHD-TRQ-HX-16T	Grapple-Forestry Heavy Duty-Tilt Rotator Coupler-Hydraulic Excavator-16 ton	2350 lbs

HYDRAULIC REQUIREMENTS: DX-GL-FYHD2-360-HX-13T, DX-GL-FYHD2-360-HX-20T, DX-GL-FYHD2-360-HX-25T
Your machine will require (1x) circuit for operation of the grapple (open and close.) It will require installation of the cable kit.
CIRCUIT 1: Grapple. TYPE: Two Way. FLOW: Max GPM / PSI - 15-20 / 3,000. CIRCUIT 2: Rotator. TYPE: Two Way. FLOW: Max GPM / PSI - 10 / 3,000.
NOT SUPPLIED: Jumper hose lines to the machine auxiliary lines.

HYDRAULIC REQUIREMENTS: DX-GL-FYHD-TRQ-HX-16T
Your machine will require (1x) circuit for operation of the grapple (open and close). CIRCUIT 1 - Grapple. TYPE: Two-way. FLOW: Max GPM / PSI - 15-20 / 3,000.
NOT SUPPLIED: Jumper hose lines to the machine auxiliary lines.

Design and specifications are subject to change without notice. Please contact Dymax sales for custom solutions: 1-800-530-5407.

DYMAX

DYMAXINC
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXINC.com
sales@DYMAXINC.com